



Milwaukee







LEADING THE CHARGE

Building on the strengths of FUEL[™] technology, MX FUEL[™] system reaches new levels of cordless performance. Focused on matching petrol, corded and pneumatic equipment, MILWAUKEE® delivers the performance the professional user expects, while eliminating the hazards associated with emissions, noise, vibrations and tool maintenance.









The world's first 350 mm battery powered cut-off saw to deliver the power to cut reinforced concrete.

DECIBEL (DB) REDUCTIONS

NO RISK OF SPILLING FUEL

SAVE MORE THAN **€1800 PER YEAR**





ENSURING OUR USERS CAN WORK SAFELY, SUSTAINABLY, AND PRODUCTIVELY.

NO LOSS OF POWER. NO LOSS OF **PRODUCTIVITY. BETTER FOR YOUR** PEOPLE. BETTER FOR OUR PLANET.

*Zero emissions when product in use



ERO EMISSIONS.* ERO COMPROMISE.





NO PETROL OR EMISSIONS

JOBSITE SAFETY

ENHANCE



INCREASED

NA BREACHDER STOL

PRODUCTIVITY

THE EU AIMS TO BE CLIMATE-NEUTRAL

THE REAL OF THE

M18 FUEL M12 FUEL



With zero emissions, there are no limitations on where work can be carried out. Indoors, underground, or in remote areas with no available power sources, MILWAUKEE®'s battery-power removes the traditional jobsite boundaries and opens up new opportunities for work.



UNRIVALLED TECHNOLOGY*

REDLITHIUM[™] **BATTERY PACK**

Industry leader in lithium-ion technology

Patented design protects against drops, water and harsh environments

Robust electronics optimise performance for every equipment and battery combination

-



REDLINK PLUS[™] INTELLIGENCE

Most advanced system of equipment electronics in the industry

Protects equipment with one of its kind thermal and overload monitoring

Delivers in-application communication, optimising equipment performance



Engineered uniquely for the demands of each piece of equipment

Optimised for the perfect combination of performance, portability and productivity

Built with maximum magnet content and top-grade rare earth magnets for optimising equipment performance



WORLD LEADER IN LITHIUM BATTERY INNOVATION



battery laboratory.

* As of February 2020 in the light equipment market



REDLITHIUM" BATTERY PACKS AND CHARGERS

SUPERIOR PACK CONSTRUCTION

Triple pack construction impact resitant housing, up to two subcores and up to 5x more rubber overmould to protect against drops, vibration, water, and extreme temperatures. This significantly improves durability in the most demanding equipment applications.

ADVANCED ELECTRONICS

REDLINK[™] intelligence provides industry-leading communication between the battery, equipment and chargers ensuring optimum equipment performance during the entire discharge, and battery life.

WORLD LEADING CELL TECHNOLOGY

MX FUEL[™] REDLITHIUM[™] batteries leverage the bestperforming and highest-quality lithium-ion technology, developed through deep partnerships with world leaders in cell design. MILWAUKEE[®] ensures optimum performance and life for the most demanding equipment applications through rigorous in-house testing in Milwaukee Tool's own world-class



MXF PS

MX FUELTM POWER SUPPLY



Т ? STREET, STREET, STREET, 100 10 Redlithium"

THE BEST TEMPORARY POWER FOR THE JOB

FEATURES

- Building on the strengths of the FUEL[™] technology, MX FUELT^M system reaches new levels of cordless performance. Focused on petrol, corded and pneumatic performance, these tools deliver without the hazards associated with emissions, noise, vibration, tripping hazards and the frustrations of complex maintenance
- Provides 3,600 peak watts and 1,800 continuous watts output of pure sine inverter energy, powering everything from high demand 16A tools to sensitive
- ✓ No emissions and quiet operation allow users to use it ✓ ONE-KEY[™] tool tracking & security offers a free of

PORTABLE POWER

ANYWHERE

- Battery powered generator eliminates the cost of petrol, maintenance, reducing downtime and increasing iobsite productivity
- Built-in charger gives users the freedom to charge any MX FUEL™ batteries in the AC mode
- management platform for your tools. ONE-KEY™ also features a remote locking functionality ✓ Robust roll cage design provides durability for outdoor jobsite use

charge cloud-based tracking network and in

MORE EFFICIENT

POWER

- Product should not be used in bad weather conditions

SPECIFICATIONS

	MXF PS-602
Running power (W)	1,800
Weight with battery (EPTA) (kg)	28.2 (2 x MXF XC406)
Includes	2 x MXF XC406 batteries, built-in charger, no kitbox
Article number	4933479266



MX FUEL™ BATTERIES

- ✓ MX FUEL[™] REDLITHIUM[™] batteries leverage the best-performing and highest-quality lithium-ion technology
 ✓ Operates down to -28.0° temperature
 ✓ Most advanced electronic power mana
- ✓ Delivering AC power in a compact and portable battery pack, allowing users to work in areas where power
- cords will struggle to reach ✓ MX FUEL[™] REDLITHIUM[™] batteries utilise unique design to protect against d extreme temperatures

		features a remote loo
NEW	NEW	

	•		-
	MXF HD812	MXF XC-608	MXF XC406
	MX FUEL™	MX FUEL™	MX FUEL™
y (Ah)	12.0	8.0	6.0

Capacity (Ah)	12.0	8.0	6.0
Number of batteries			
Charge duration MXF C	180 min	105 min	90 min
Charge duration MXF SC	65 min	45 min	45 min
Weight (kg)	5.9	4.5	4.8
Supplied in	No kitbox	No kitbox	No kitbo
Article number	4932492128	4932492130	49334718

MX FUEL™ BATTERIES

✓ Charges all MX FUEL[™] batteries

Syster

- ✓ Increases productivity at the jobsite
- ✓ REDLINK[™] intelligence optimise the charge rate for each battery to minimise charge time
- ✓ On-board carry handle
- ✓ LED Light indicates 80% state of charge

Charging ports	
Charge type	
Power source	
Carry handle	
Wall mountable	;
Weight (kg)	
Supplied in	
Article number	

MX FUEL^M BATTERY AND CHARGER KITS ONE REY





- Most advanced electronic power management system communicates with the tool in order to deliver full power in balance with maximum durability
- ✓ ONE-KEY™ tool tracking & security offers a free of charge cloud-based tracking network and inventory management platform for your tools. ONE-KEY™ also
 - king functionality
- ✓ Enables the user to run tools in confined spaces as well as indoors or in trenches
- \checkmark Offering a new solution in comparison to petrol



	Core-
MXF SC	MXF C
1 x MX FUEL™	1 x MX FUEL™
Single	Single
AC	AC
Yes	Yes
No	Yes
8.9	2.7
Supplied without a box	Supplied without a box
4932492848	4933471839



MXF NRG-802	MXF NRG-122	
MX FUEL [™]	MX FUEL [™]	
08 batteries, MXF SC charger, no kitbox	2 x MXF HD812 batteries, MXF SC charger, no kitbox	
4933493548	4933493549	

REDLITHIUM"

www.milwaukeetool.lv



MXF CVBP

MX FUELTM BACKPACK CONCRETE VIBRATOR

FEATURES

- ✓ The MX FUEL[™] Backpack Concrete Vibrator is the ideal solution when working on larger areas, delivering AC like performance without the hassle of laying cables or having the need for a AC socket on the jobsite
- ✓ It has the power to push up to ø63 mm head at over 11,200 VPM for ptimal consolidation, even in the stiffest concrete The push-button start delivers instant power, eliminating the repetitive motions of a pull start
- and reducing downtime, allowing you to get jobs done faster without acrificing the power and run time vou expect The modular design makes it easy
- to remove the backpack harness for walls and columns
- Modular design with just one click from backpack to briefcase ✓ It can accept shafts up to 6.4 m long
- and heads up to ø63 mm without sacrificing power

- ✓ Consolidates up to 40 m³ of concrete on 1x MXF XC406 battery
- ✓ The wireless remote gives you the ability to turn the machine on when using long shafts
- shafts are available separately Building on the strengths of the FUEL[™] technology, MX FUEL[™] system reaches new levels of cordless performance. Focused on petrol, corded and pneumatic performance, these tools deliver without the hazards associated with emissions, noise, vibration, tripping hazards and the frustrations of
- ONE-KEY™ tool tracking & security offers a free of charge cloud-based tracking network and inventory management platform for your tools. ONE-KEY™ also features a remote locking functionality. Customisation function allows for precise tool adjustment to application
- Supplied with remote control



ONE

MXF CVBC

MX FUELTM CONCRETE VIBRATOR

FEATURES

- ✓ Compact and slim design for sed mobility suiting stationary as well as mobile applications
- Carrying strap and handle for increased flexibility on site and easy
- Equipped with a ring for easy attachment of the vibrator to the scaffolding or the formwork
- ✓ The MX FUEL[™] Briefcase Concrete Vibrator is the ideal solution whe working on walls and columns, delivering AC like performance without the hassle of laying cables or having the need for an AC socket on
- It has the power to push up to ø 63 mm head at over 11,200 VPM for optimal consolidation, even in the
- instant power, eliminating the repetitive motions of a pull start and reducing downtime, allowing you to get jobs done faster without sacrificing the power and run time vou expect

It can accept shafts up to 6.4 m long and heads up to ø63 mm without sacrificing power

- concrete on 1x MXF XC406 battery
- The wireless remote gives you the ability to turn the machine on from up to 9 m away for more freedom when using long shafts
- System attachments, heads and shafts are available separately
- Building on the strengths of the FUEL[™] technology, MX FUEL[™] cordless performance. Focused performance, these tools deliver without the hazards associated wi emissions, noise, vibration, tripping hazards and the frustrations o complex maintenance
- ONE-KEY[™] tool tracking & ? security offers a free of charge cloud-based tracking networ Iea platform for your tools

SPECIFICATIONS

	MXF CVBP-0	MXF CVBP-602	MXF CVBPKIT-602
Vibrations (1/min)	11,200	11,200	11,200
Colums	¥	 ✓ 	¥
Footings	<i>VV</i>	<i>vv</i>	V V
Slabs	VVV	VVV	VVV
Walls	¥	 ✓ 	¥
Weight with battery (EPTA) (kg)	15.7 (MXF XC406)	15.7 (MXF XC406)	15.7 (MXF XC406)
Supplied with	Remote control	Remote control	Remote control, 2 m vibrator shaft, 38 mm vibrator head
Includes	No batteries, no charger, no kitbox	2 x MXF XC406 batteries, MXF C charger, no kitbox	2 x MXF XC406 batteries, MXF C charger, no kitbox
Article number	4933479595	4933479591	4933479593
			REDLITHIUM [*]

SPECIFICATIONS

	MXF CVBC-0	MXF CVBC-602	MXF CVBCKIT-602
Vibrations (1/min)	11,200	11,200	11,200
Colums	VVV	~~~	~~~
Footings	<i>VV</i>	 ✓ 	V V
Slabs	¥	 ✓ 	 ✓
Walls	VVV	VVV	~~~
Weight with battery (EPTA) (kg)	10.3 (MXF XC406)	10.3 (MXF XC406)	10.3 (MXF XC406)
Supplied with	Remote control	Remote control	Remote control, 4 m vibrator shaft, 38 mm vibrator head
Includes	No batteries, no charger, no kitbox	2 x MXF XC406 batteries, MXF C charger, no kitbox	2 x MXF XC406 batteries, MXF C charger, no kitbox
Article number	4933479607	4933479608	4933479610
			REDLITHIUM ^{**}

BUILD YOUR KIT

MXF CVBP-602

MX FUEL™ BACKPACK CONCRETE VIBRATOR Article number 4933479591















CHOOSE VIBRATOR HEAD



9



MXF PSC **MX FUELTM SCREED**



MXF DCD350

MX FUEL[™] 350 MM **DIAMOND CORE DRILL**

FEATURES

- ✓ The MX FUEL[™] Screed is the ideal solution when working or larger areas, delivering petrol like performance without petrol headaches
- ✓ Power to pull blades up to 4.9 r ✓ The push-button start delivers instant power, eliminating the repetitive motions of a pull start and reducing downtime, allowing you to get jobs done faster withou sacrificing the power and run time you expect
- ✓ The POWERSTATE® brushless motor delivers the power to pull 4.9 m bar at 9,000 VPM with a variable speed trigger, giving you maximum control in stiff and wet concrete
- ✓ Foldable handles for easy transport on site and in concrete
- ✓ Easy quick connect system of the blade with two bolts

- ✓ Up to 2 hrs of run time per charge with the 3.65 m blade and the MXF CP203 battery
- System attachments, blades are available separately
- Building on the strengths o the FUEL[™] technology, MX FUEL[™] system reaches new Focused on petrol, corded and pneumatic performance, these tools deliver without the hazards associated with emissions noise, vibration, tripping hazards and the frustrations of complex
- ✓ ONE-KEY[™] tool tracking & security offers a free of charge cloud-based tracking network and inventory management platform for your tools. ONE-KEY™ also features a remote ocking functionality ✓ Supplied with a ⁹/₁₀[™] wrench



POWER TO PULL 4,9 M BLADE

NO GAS HEADACHES

2 HOURS PER CHARGE W/ 3,65 M BLADE

POWER TO CORE 350 MM HOLES IN **REINFORCED CONCRETE**

SPECIFICATION

Max. drilling concrete (mm)

No load

Tool rece

Weight

Stand

Artic

EASIEST CORING ANYWHERE

SPECIFICATION

	MXF PSC-0	MXF PSC-302	MXF PSCKIT-302
Vibrations (1/min)	9,000	9,000	9,000
Weight with battery (EPTA) (kg)	16.8 (MXF CP203)	16.8 (MXF CP203)	16.8 (MXF CP203)
Standard equipment	-	-	3 m blade
Includes	No batteries, no charger, no kitbox	2 x MXF CP203 batteries, MXF C charger, no kitbox	2 x MXF CP203 batteries, MXF C charger, no kitbox
Article number	4933479771	4933479772	4933479774

REDLITHIUM"

BLADES FOR MX FUEL[™] SCREED (MXF PSC)

	Length (m)	Weight (kg)	Article number	
MXF PSB-1.22 m	1.22	3.6	4932479776	
MXF PSB-1.83 m	1.83	5.5	4932479777	101
MXF PSB-2.44 m	2.44	7.3	4932479778	iel .
MXF PSB-3.00 m	3.00	9.1	4932479779	
MXF PSB-3.65 m	3.65	10.9	4932479780	
MXF PSB-4.25 m	4.25	12.8	4932479781	
MXF PSB-4.87 m	4.87	14.6	4932479782	

speed (rpm)	0 - 390/ 0 - 850/ 0 - 1650/ 0 - 2200	1650/ 0 - 22
eption	1 ¼″ UNC + ½″ G	1 ¼″ UNC + ½
vith battery (EPTA) (kg)	27.6 (MXF HD812)	27.6 (MXF HD8
d equipment		MXF DCD350 DR

dard equipment		MXF DCD350 DR stand	MXF DCD350 stand
des	No batteries, no charger, no kitbox	No batteries, no charger, no kitbox	2 x MXF HD812 batter- ies, MXF SC charger, no kitbox
le number	4933493146	4933493142	4933493143

REDLITHIUM"

0 - 390/ 0 - 850/ 0 -

27.6 (MXF HD812)

1650/ 0 - 2200

MXF DCD350 VP **MX FUEL™ VACUUM** PLATE



NEV

1

MXF DCD350 DD-0 MXF DCD350 KIT-0 MXF DCD350 KIT-122

- ✓ Tool-free attachment to MXF DCD350 MX FUEL™ 350 mm diamond core drill
- ✓ Coring up to ø300 mm with vacuum

✓ Vacuum plate with pressure gauge

Article number 4932493147

recommended vacuum pump (4932352094 MXF DCD350-150 AP

MX FUEL™ VACUUM PLATE

Article number 4932493148

- ✓ Tool-free attachment to MXF DCD350 MX FUEL™ 350 mm diamond core drill
- ✓ Vacuum plate with pressure gauge
- ✓ Coring up to ø300 mm with vacuur recommended vacuum pump (4932352094)





FEATURES

- reinforced concrete
- ✓ Rig-mounted diamond coring up to 350 mm diameter. Core with confidence by delivering AC performance
- ✓ 4 speed gearing for a wide range of applications, with laser etched speed and capacity markings into the metal body
- ✓ Speed 1: up to 51 mm / Speed 2: 51 - 76 mm / Speed 3: 76 - 152 mm / Speed 4: 152 - 350 mm
- ✓ On-board pressure gauge allows user to optimise drilling speed in order to get the best lifetime of machine and accessory
- On-board battery gauge allows the user to monitor battery capacity during entire drilling process



- ✓ 1 1/4" UNC + 1/2" G core fitting to fit most common cores, with friction plate design allowing for easy cor changes
- the core drill to the drill stand
- Can be used with optional vacuum pump on smooth and even surfaces
- ✓ Building on the strengths of the FUEL[™] technology, MX FUEL[™] system reaches new levels of cordless performance. Focused on petrol, corded and pneumatic performance, these tools deliver without the hazards associated with emissions, noise, vibration, tripping complex maintenance
- offers a free of charge cloud-based tracking network and inventory management platform for your tools ONE-KEY™ also features a remote locking functionality



TOOL-FREE QUICK LOCK CONNECTION

WET DIAMOND DRILLING CORES WCHP & WCHP-SB ABOVE 52 MM

- Standard 1 ¼' UNC reception
- Engraving of diameter and type on the core reception naterm visil
- Laser welded segments guarantee against break off
- 10 mm segment height for superior life time
- Uniquely designed TURBO shaped segments -Pre-grinded, for best performance right from the first hole
- One outer and two inner slots enable improved cooling and increased material removal



	Ø (mm)	Reception	Working lenght (mm)	Total lenght (mm)	Article number
WCHP 52 mm 1 ¼" UNC - 1 pc	52	1 ¼″ UNC	450	525	4932399707
WCHP 62 mm 1 ¼" UNC - 1 pc	62	1 ¼″ UNC	450	525	4932399708
WCHP 72 mm 1 ¼" UNC - 1 pc	72	1 ¼″ UNC	450	525	4932399709
WCHP 82 mm 1 ¼" UNC - 1 pc	82	1 ¼″ UNC	450	525	4932399710
WCHP 92 mm 1 ¼" UNC - 1 pc	92	1 ¼″ UNC	450	525	4932399711
WCHP 102 mm 1 ¼" UNC - 1 pc	102	1 ¼″ UNC	450	525	4932399712
WCHP 112 mm 1 ¼" UNC - 1 pc	112	1 ¼″ UNC	450	525	4932399713
WCHP 122 mm 1 ¼" UNC - 1 pc	122	1 ¼″ UNC	450	525	4932399714
WCHP 132 mm 1 ¼" UNC - 1 pc	132	1 ¼″ UNC	450	525	4932399715
WCHP 152 mm 1 ¼" UNC - 1 pc	152	1 ¼″ UNC	450	525	4932399716
WCHP 162 mm 1 ¼" UNC - 1 pc	162	1 ¼″ UNC	450	525	4932399717
WCHP 172 mm 1 ¼" UNC - 1 pc	172	1 ¼″ UNC	450	525	4932352052
WCHP 182 mm 1 ¼" UNC - 1 pc	182	1 ¼″ UNC	450	525	4932399718
WCHP 202 mm 1 ¼" UNC - 1 pc	202	1 ¼″ UNC	450	525	4932399719
WCHP 225 mm 1 ¼" UNC - 1 pc	225	1 ¼″ UNC	450	525	4932399720
WCHP 250 mm 1 ¼" UNC - 1 pc	250	1 ¼″ UNC	450	525	4932399721
WCHP 300 mm 1 ¼" UNC - 1 pc	300	1 ¼″ UNC	450	525	4932399722
WCHP 350 mm 1 ¼" UNC - 1 pc	350	1 ¼″ UNC	450	525	4932399723



MXF DCD150

MX FUELTM 150 MM **DIAMOND CORE DRILL**



EASIEST CORING ANYWHERE

FEATURES

- ✓ Core with confidence by delivering AC performance with a maximum core diameter capacity of 152 mm wet & drv
- ✓ 2 speed gearing for a wide range of applications, with laser etched speed and capacity markings into the metal body
- ✓ Speed 1: up to 75 mm diameter wet & dry coring at
- ✓ Speed 2: 76 to 152 mm diameter wet & dry coring 800
- protection, preventing over rotating when losing control or in case of a stuck core
- **SPECIFICATIONS**

✓ On-board level sensor guides the user to achieve a straight and accurate finish whilst horizontal drilling On-board pressure gauge allows user to optimise

152 MM CAPACITY

- drilling speed in order to get the best lifetime of machine and accessory
- On-board battery gauge allows the user to monitor battery capacity during entire drilling process
- Integrated water line for wet coring that is compatible with the M18™ SWITCH TANK™ interchangeable sprayer and water supply system
- ✓ 1 ¼' UNC + ½' G core fitting to fit most common cores, with friction plate design allowing for easy core changes
- ✓ Separately available core drill stand MXF DR255TV with 60 mm collar - 60 mm mount on the core drill fits most universal core stands

INCREASED

PRODUCTIVITY

ONERKEY

- Building on the strengths of the FUEL[™] technology, MX FUEL[™] system reaches new levels of cordless pneumatic performance, these tools deliver without the hazards associated with emissions, noise, vibration, tripping hazards and the frustrations of complex
- ✓ ONE-KEY™ tool tracking & security offers a free of charge cloud-based tracking network and inventory management platform for your tools. ONE-KEY™ also features a remote locking functionality

	MXF DCD150-0C	MXF DCD150-302C	MXF DCD150-302C KIT
No load speed (rpm)	0 - 800/ 0 - 1600	0 - 800/ 0 - 1600	0 - 800/ 0 - 1600
Drilling capacity in concrete 1st/ 2nd gear (mm)	76 - 152/ 25 - 76	76 - 152/ 25 - 76	76 - 152/ 25 - 76
Tool reception	1 ¼″ UNC + ½″ G	1 ¼″ UNC + ½″ G	1 ¼″ UNC + ½″ G
Weight with battery (EPTA) (kg)	12.4 (MXF CP203)	12.4 (MXF CP203)	12.4 (MXF CP203)
Standard equipment	Trigger lock-on, side handle	Trigger lock-on, side handle	Trigger lock-on, side handle, MXF DR255TV drill stand
Includes	No batteries, no charger, box	2 x MXF CP203 batteries, MXF C charger, box	2 x MXF CP203 batteries, MXF C charger, box
Article number	4933478986	4933464887	4933471835

MXF DR255TV

PREMIUM MX FUEL™ **DIAMOND DRILLING STAND** FOR DIAMOND CORE DRILL Article number 4933472247

- ✓ Height-adjustable insulated drive handle and easy to reach depth adjustment handle to facilitate one-handed operation
- ✓ Universal hinged motor clamp with 60 mm collar diameter
- ✓ Tool-free machine and watertank attachment compatible with M18[™] SWITCH TANK[™] 15 I water supply
- ✓ With extra long column for use with cordless MXF DCD150 diamond drilling tool, for drilling holes up to o250 mm
- ✓ Drill angle indication on base plate, can be variably tilted from 0° to 45°
- ✓ Adjustable sliding blocks
- ✓ Lightweight and durable aluminium design
- ✓ Concrete drop anchor fixing set (4932399731) included

VACUUM PUMP VP6

Article number 4932352094

 Vacuum pump VP6 for fastening of the diamond drill rig on smooth and even surfaces. Suction capacity: 850 mbar. Max. vacuum pressure: 6 m³/h/ 100 l/min. Rated voltage: 220-240 V. Supplied with 5 m hose with DW7

FIXING KIT

- Article number 4932399731
- ✓ Fixing kit for exclusive use in concrete. ø16 mm drill bit is required to set the drop anchor. Kit includes stud bolt, setting tool, wing nut, washe and 5 pcs of M12 drop anchor

1000

River

VACUUM SEAL

Article number 4931400613

✓ Replacement seal for the drilling rig. To vacuum fix the rig on the ground/wall

WT 10 WATERTANK Article number 4932399726

✓ Watertank WT 10. 10 liters capacity, steel water tank with inside and outside polyester coating. Reliable brass pump with a max. pressure bar of 6 bar. 2.5 m hose with quick connection system fits direct to MILWAUKEE®



WATER COLLECTION RING MAX. Ø 180 MM

Article number 4932399727

diamond drills

✓ Aluminium water collection ring for wet drilling operations. For use with max. ø180 mm core bits. Suitable for overhead coring







MX FUEL™ THIN KERF WET DIAMOND DRILLING CORES

✓ Standard 1/2" G reception up to 45 mm, standard 1 1/4" UNC reception from 46 mm to 150 mm

- ✓ Laser welded segments guarantee against break off
- ✓ 10 mm segment height for superior life time
- ✓ For wet drilling
- ✓ Suitable for reinforced concrete



Model	Ø (mm)	Reception	Working lenght (mm)	Total length (mm)	Article number
WCHP-TK 12 mm	12	½″ G	200	270	4932472167
WCHP-TK 14 mm	14	½″ G	300	370	4932472168
WCHP-TK 16 mm	16	½″ G	300	370	4932472169
WCHP-TK 18 mm	18	½″ G	300	370	4932472170
WCHP-TK 20 mm	20	½″ G	300	370	4932472171
WCHP-TK 22 mm	22	1⁄2″ G	300	370	4932472172
WCHP-TK 24 mm	24	½″ G	300	370	4932472173
WCHP-TK 25 mm	25	½″ G	300	370	4932472174
WCHP-TK 28 mm	28	½″ G	300	370	4932472175
WCHP-TK 30 mm	30	½″ G	300	370	4932472176
WCHP-TK 32 mm	32	½″ G	300	370	4932472177
WCHP-TK 35 mm	35	½″ G	300	370	4932472178
WCHP-TK 40 mm	40	½″ G	300	370	4932472180
WCHP-TK 46 mm	46	1 ¼″ UNC	450	525	4932478953
WCHP-TK 51 mm	51	1 ¼″ UNC	450	525	4932472184
WCHP-TK 56 mm	56	1 ¼″ UNC	450	525	4932472185
WCHP-TK 61 mm	61	1 ¼″ UNC	450	525	4932472186
WCHP-TK 66 mm	66	1 ¼″ UNC	450	525	4932472187
WCHP-TK 68 mm	68	1 ¼″ UNC	450	525	4932478954
WCHP-TK 71 mm	71	1 ¼″ UNC	450	525	4932472188
WCHP-TK 76 mm	76	1 ¼″ UNC	450	525	4932472189
WCHP-TK 81 mm	81	1 ¼″ UNC	450	525	4932472190
WCHP-TK 86 mm	86	1 ¼″ UNC	450	525	4932472191
WCHP-TK 91 mm	91	1 ¼″ UNC	450	525	4932472192
WCHP-TK 101 mm	101	1 ¼″ UNC	450	525	4932472193
WCHP-TK 105 mm	105	1 ¼″ UNC	450	525	4932472194
WCHP-TK 111 mm	111	1 ¼″ UNC	450	525	4932472195
WCHP-TK 121 mm	121	1 ¼″ UNC	450	525	4932472196
WCHP-TK 126 mm	126	1 ¼″ UNC	450	525	4932478955
WCHP-TK 130 mm	130	1 ¼″ UNC	450	525	4932472197
WCHP-TK 140 mm	140	1 ¼″ UNC	450	525	4932472198
WCHP-TK 150 mm	150	1 ¼″ UNC	450	525	4932472199

DRILLING SHROUD

PHDE152

Article number 4932471990



✓ Drilling shroud for drilling and dry coring from
 [™] 25 - 152 mm. Brush insert to improve suction and extraction



MXF COS350

MX FUEL[™] 350 MM **CUT-OFF SAW**



FASTEST CUTS FROM **START TO FINISH**

350 MM CUT CAPACITY

NO GAS HEADACHES

ONE-KEY[™] tool tracking & security offers a free of

management platform for your tools. ONE-KEY™ also features a remote locking functionality

charge cloud-based tracking network and inve

FEATURES

- ✓ The world's first 350 mm battery powered cut-off saw to deliver the power to cut reinforced concrete with a full 350 mm cut capacity
- ✓ Faster cuts, start to finish: 3 second push button start up eliminates the need to mix petrol and oil, and avoids petrol engine maintenance
- fume emissions
- Petrol-equivalent performance with a maximum noload speed of 5370 rpm and a full 125 mm depth of cut
- ✓ Building on the strengths of the FUEL[™] technology, MX FUEL[™] system reaches new levels of cordless ✓ Quieter than other petrol equivalent saws, with a low engine vibration and well-balanced weight performance. Focused on petrol, corded and pneumatic performance, these tools deliver without the Keyless adjustable blade guard & on-board water line for wet cutting which is compatible with the M18 SWITCH TANK™ interchangeable sprayer and water tripping hazards and the frustrations of complex
- supply system Separately available cut-off saw cart MXF COSC to maintain straight cuts
- Supplied with HUDD 350 mm diamond blade (4932471985), contractor bag for batteries and charger

SPECIFICATIONS

	MXF COS350-0	MXF C0S350-602
No load speed (rpm)	5370	5370
Blade diameter (mm)	350	350
Bore size (mm)	20/ 25.4	20/ 25.4
Max. cutting depth (mm)	125	125
Weight with battery (EPTA) (kg)	16.7 (MXF XC406)	16.7 (MXF XC406)
Includes	No batteries, no charger, no kitbox	2 x MXF XC406 batteries, MXF C charger, no kitbox
Article number	4933478984	4933464881



MXF COSC **MX FUEL™ CUT-OFF**

SAW CART Article number 4933464883

- ✓ Light weight 350 mm cut-off saw cart to maintain straight cuts with full 125 mm depth of cut capacity
- Height-adjustable drive handle and easy to reach depth adjustment handle to facilitate one-handed operation
- Tool-free machine and water tank attachment compatible with the M18[™] SWITCH TANK[™] interchangeable spraver and water supply system
- ✓ Full mobility with on-board spare battery storage
- ✓ Easily collapsible for transport and storage
- ✓ Supplied with 11.4 I gravity feed tank

M18 BPFPH-0

M18™ SWITCH TANK™ POWER BASE

Article number 493346496

- ✓ The M18™ SWITCH TANK™ 15 I backpack fluid pump sprayer delivers the industry's first interchangeable tank design with no manual pumping
- The interchangeable tank design isolates the pump, hose and wand, separating wearable components from the M18 SWITCH TANK[™] powered base
- Add on and replace tank assemblies to eliminate cross chemical contamination and lower cost of ownership
- ✓ 120 PSI (8.27 Bar) pump pressure
- ✓ Features adjustable pressure selection dial to best suit

M18 BPFP-WST

requirements

M18[™] SWITCH **TANK™ 15 L** WATER SUPPLY Article number 4933464965

- ✓ Fully compatible with SWITCH TANK[™] ✓ Water sprayer tank for efficient water delivery for
- concrete cutting and coring applications. Also useful for washing up slurry's, areas and equipment
- ✓ Semi-transparent tank with measuring scale to know how much liquid is inside the tank

SPEEDCROSS ADD ✓ ADD is most suitable for asphalt

- ✓ Double tensioned core for an improved durability and better stability whilst cutting
- Angled, special wear-retardant segments to avoid a segment tear-off

Туре	Disc diameter (mm)	Bore size (mm)	Segment height (mm)	Cutting width (mm)	Article number
ADD 350 mm	350	25.4	10	2.8	4932478952





11.1 11.1 Ģ

HUDD 350

SPEEDCROSS

- ✓ Maximum Speed, Long Life, Low Vibration
- ✓ Universal blade for a variety of materials
- ✓ Classed into two categories for maximum lifetime
- ✓ 10 mm segments height to ensure long lifetime
- ✓ Laser welded segments for best performance
- ✓ Low vibration

SPEEDCROSS HUDD



Туре	Disc diameter (mm)	Bore size (mm)	Segment height (mm)	Cutting width (mm)	Article number
HUDD 350	350	25.4	8	2.6	4932471985

DUH DIAMOND **BLADES**



A trade laser welded quality blade with exceptional performance in hard mat such as hard concrete, block paviors and masonry products

Туре	Disc diameter (mm)	Bore size (mm)	Segment height (mm)	Cutting width (mm)	Article number
DUH 350	350	25.4	10	2.8	4932471986

SPEEDCROSS **STEELHEAD™** DIAMOND BLADES





- STEELHEAD[™] is most suitable for steel and stainless steel. Also suitable for heavily reinforced concrete
- ✓ High density of special brazed diamonds ensure a very aggressive cutting progress

Туре	Disc diameter (mm)	Bore size (mm)	Segment height (mm)	Cutting width (mm)	Article number
STEELHEAD™ 350	350	25.4	4	2.8	4932471988

PRO+ METAL CUTTING DISC



Suitable for acid-resistant steel, hardox, high-alloy steel, mild and tool steel. No suitable for stainless steel

Applications: Iron and sulphur free thin cut-off wheels for steel

Туре	Disc diameter (mm)	Thickness (mm)	Bore size (mm)	Article number
SCS 41 /350	350	4	25.4	4932471989
DUCTI CUTTI				
✓ Applications:	Ductile iron, nor	n-ferrous metals &	stone	

Туре	Disc diameter (mm)	Thickness (mm)	Bore size (mm)	Article number
CCS 41 / 350	350	4	25.4	4932472264



MXF DH2528H

ONE KEY

HIUM"

MX FUEL™ 25 KG CLASS **28 MM HEX DEMOLITION** HAMMER

MOST PRODUCTIVE, LOWEST VIBRATION

FASTER, SAFER, EASIER, DEMOLITION

integrated service indicator light alerting the user ever

40 hours to add grease


FEATURES

?

- The industry's first cordless 28 mm Hex demolition hammer, delivering the power of petrol, corded and pneumatic
- Heavy Duty hammer provides 64 blow Joules of impact energy for toughest demolition applications
- Floating body anti-vibration technologies allows the user to work all day without reaching dangerous exposure levels

SPECIFICATIONS

	MXF DH2528H-0	MXF DH2528H-602
Tool reception	28 mm K-Hex	28 mm K-Hex
Blow energy (EPTA) (J)	64	64
Full load hammer action (BPM)	1300	1300
Vibration chiseling (m/s²)	5.17	5.17
Weight with battery (EPTA) (kg)	29.6 (MXF XC406)	29.6 (MXF XC406)
Includes	No bettery, no charger, no kitbox	2 x MXF XC406 batteries, MXF C charger,no kitbox
Article number	4933478985	4933464877



- ONE-KEY[™] tool tracking & security offers a free of Breaks up to 2 tons of concrete or a 12 m (20 cm deep and 30 cm wide) trench on 1 x MXF XC406 battery
 - charge cloud-based tracking network and inventory management platform for your tools. ONE-KEY™ also features a remote locking functionality
 - Supplied with 1 x 28 mm Hex pointed chisel (4932459774), 1 x 28 mm Hex 35 mm flat chise (4932459775)

LIGHTEST WEIGHT



MXF DHT

BREAKER TROLLEY FOR MX FUEL™ DEMOLITION HAMMER Article number 4933464879

Lightweight demolition hammer cart with large rubber wheels for easy transport across uneven terrain

- Integrated demolition hammer retention strap and full-meta
- fastening locations
- On-board spring-loaded storage locations for 4 chisel
- ✓ Battery & charger storage dock with charger cable hook for transport

AS 30 MAC

30 L M-CLASS DUST EXTRACTOR Article number 4933459415

- ✓ Compact 30 litre tank for site/workshop use
- ✓ 4500 litres/min airflow with 250 mbar suction
- ✓ Dust class M. Standard MAK-factor > 0.1 mg/m³: mine
- dust, wood dust (oak, beech) ✓ Power take off for auto switching of powertools

AS 42 MAC

42 L M-CLASS DUST EXTRACTOR

Article number 4933459418

- ✓ Compact 42 litre tank for site/workshop use
- ✓ 4500 litres/min airflow with 250 mbar suction
- Dust class M. Standard MAK-factor > 0.1 mg/m³: miner dust, wood dust (oak, beech)
- \checkmark Power take off for auto switching of powertools
- Durable PTFE filter with high filtration efficiency and washable non-stick membrane







28 MM HEX CHISELS



	Description	Total length (mm)	Blade width (mm)	Article number
1.	28 mm Hex pointed chisel	400	-	4932459774
2.	28 mm Hex flat chisel	400	35	4932459775
3.	28 mm Hex flat chisel	400	80	4932459776
4.	28 mm Hex spade chisel	400	125	4932479221
5.	28 mm Hex asphalt cutter	440	115	4932479222
6.	28 mm Hex toolholder	390		4932479223
7.	28 mm tamping plate	200	200	4932479224

BREAKER BOOT

Article number 4932471992

- Universal fit Fits most 28 & 30 mm breaking
- Perfect match to 28 mm MX FUEL[™] break
- ✓ Slim design for reaching tight areas
- Hose clip adapter for easy attachment to MILWAUKEE® vacuum cleaners





MXF LSDP

ONE

MX FUELTM LARGE SEWER DRUM MACHINE WITH **POWERTREDZ[™]**



POWERTREDZ™ LIFT ASSIST

MESS CONTAINED

containment whilst unclogging drains

Electronic foot pedal with non-slip grip and an integrated drum brake electronically slows the drum very fast for maximum end user control and safety

POWER TO CLEAR ROOTS AT 60 M

✓ MX FUEL[™] drum capacity for 16 mm x 30 m long and ✓ ONE-KEY[™] tool tracking & security offers a free of

charge cloud-based tracking to scenity of the inventory management platform for your tools. ONE-KEYTM also features a remote locking functionality

FEATURES

- ✓ The MX FUEL™ large sewer drum machine with integrated POWERTREDZ™ assists one-person only to move the sewer machine in and out of the service van,
 ✓ Fully enclosed drum eliminates free spinning parts, providing the user with more protection whilst working in and around fragile fixtures as well as better mess up and down building stairs
- World's first battery powered large drum machine that uses MILWAUKEE® 16 mm and 20 mm inner core spirals in drains from 75 mm up to 200 mm, with the power to clear roots up to 60 m down the line

SPECIFICATIONS

	MXF LSDP-301		
No load speed (rpm)	200		
Drain capacity (mm)	75 - 200		
Spiral diameter (mm)	20		
Spiral length (m)	23		
Weight with battery (EPTA) (kg)	56.6 (MXF CP203)		
Standard equipments	1 x 20 mm x 15,2 mm inner core cable 1 x 20 mm x 7,6 mm inner core cable, 1 x 9 pc head attachment kit		
Includes	1 x MXF CP203 battery, MXF C charger, no kitbox		
Article number	4933471851		





ACCESSORIES - MXF LSDP

	Description	Compatible with model MXF LSDP	Article number	
	16 mm x 7,6 m Inner core	¥	4932471701	
	16 mm x 15,2 m Inner core	~	4932471702	
	20 mm x 7,6 m Inner core	~	4932471703	
Inner core SD	20 mm x 15,2 m Inner core	¥	4932471704	
	16 mm Anchor cable	v	4932471707	
	16 mm x 60 cm Anchor cable	¥	4932471708	
	20 mm x 600 mm Anchor cable	v	4932471709	
Straight auger SD	Medium funnel auger for 10, 13, 16 mm cables	v	48532830	hamment
Funnel auger SD	Funnel auger for 16, 20 mm cables	v	48532831	=====• \
	75 mm root cutter for 16 & 20 mm cables	×	48532832	¢.
Root cutter SD	100 mm root cutter for 16 & 20 mm cables	×	48532833	
	150 mm root cutter for 16 & 20 mm cables	4	48532834	
Opening tool CD	Small opening tool for 16, 20 mm cables	v	48532835	
Opening tool SD	Medium opening tool for 16, 20 mm cables	v	48532836	•
Chain knocker SD	75 mm chain knocker for 16, 20 mm cables	v	48532837	
	100 mm chain knocker for 16, 20 mm cables	v	48532838	<u>a</u>
Head kit SD	9 pc head kit 16, 20 mm cables	¥	48532840	
Guide hose for model MXF LSDP	Guide hose for model MXF LSDP	¥	4932478110	
Pin key	Pin key for all cables	~	4932471717	0



MXF PTR2

COMING MX FUELTM PIPE SOON THREADING MACHINE 2[°] WITH ONE-KEY[™]

FEATURES

- ✓ Threading capacity from 1/8" all the way up to 2" ✓ One stop shop: Cut, Ream and
- Thread with one tool Maximum mobility thanks to foldable
- wheel cart with tool free setup ✓ Unique vertical storage capability
- ises used space during transportation or in the warehouse High versatility through front and backside fully featured hammer chucks that allow use of grooving attachments on the back of the
- machine ✓ All day long run time with up to 140 cycles (Cut+Ream+Thread) on one MX FUÈL™ 6.0 Ah battery
- Integrated auto oil system with oil pump and reservoir

- Outstanding performance with 2 speed settings of 39 RPM and 59 RPM matching corded speed Threading capacity from 1/8" all the
- way up to 2 ✓ ONE-KEY[™] tool tracking & security offers a free of charge cloud-base tracking network and inventory
- management platform for your tools. ONE-KEY™ also features a remote locking functionality ? Building on the strengths of the FUEL™ technology, MX FUEL™ system reaches new lev of cordless performance. Focused on petrol, corded and pneumatic performance, these tools deliver thout the hazards assoc

omplex maintenance

MXF PTR2-601

0 - 39/0 - 59

1/2"-3/4" BSPT HS die set, 1"-2" BSPT HS die set

115 (MXF XC406)

1 x MXF XC406 battery, MXF C charger, no kitbox

4933492100

with emissions, noise, vibration, tripping hazards

MAXIMUM MOBILITY

SPECIFICATIONS

FAST SET UP

UP TO 140 3/4″ CYCLES ON ONE MX FUEL™ 6.0 AH BATTERY CHARGE

ONE

PIPE THREADER DIES

Description	Туре	Thread size (inch)	Article number	
PTR2D 1/2" - 3/4"	NPT	¹ / ₂ - ³ / ₄	48361205	
PTR2D 1" - 2" NPT HSS	NPT HSS	1 - 2	48361206	L
PTR2D 1/2" - 3/4" BSPT 4	BSPT Alloy	1/2 - 3/4	4932492924	
PTR2D 1" - 2" BSPT Alloy	BSPT Alloy	1 -2	4932492925	
PTR2D 1/2" - 3/4" BSPT HS	BSPT HS	1/2 - 3/4	4932492926	-
PTR2D 1" - 2" BSPT HS	BSPT HS	1 - 2	4932492927	1
PTR2D 1/2" - 3/4" BSPT	BSPT HSS	1/2 - 3/4	4932492928	
PTR2D 1" - 2" BSPT HSS	BSPT HSS	1 - 2	4932492929	

EDLITHIUM[®]

NEW

PTR2 DH NPT

Speed settings No load speed (rpm)

Thread size (inch)

Includes

Standard equipment

Weight with battery (EPTA) (kg)

NPT DIE HEAD FOR MX FUEL™ **STATUIONARY 2**" PIPE THREADER

Article number 49165100

PTR2 CW

PIPE CUTTER WHEEL FOR MX FUEL™ **STATUIONARY 2**" PIPE THREADER Article number 48361401



PTR2 DH BSPT

BSPT DIE HEAD FOR MX FUEL™ **STATUIONARY 2**" PIPE THREADER

PTR2 RC

REAMER CONE THREADING **MACHINE FOR MX FUEL™ STATUIONARY 2**" **PIPE THREADER** Article number 49165105



REDLITHIUM

Server an and the server

MOST PORTABLE 3 M LIGHT, INSIDE/OUTSIDE

FEATURES

MXF TL

- ✓ TRUEVIEW[™] high definition light output with up to 27000 lumens in AC and up to 20000 lumens in DC node for both task and area lighting
- Has the ability to manoeuvre the light heads in multiple orientations, allowing the user to direct light to wherever it's needed
- ✓ Low weight of 48 kg with the two big all-terrain wheels, this tower light is easy to transport across wet and uneven job site terrains with minimum effort
- to 3.10 meter and can withstand up to 55 km/h of wind To withstand the toughest conditions on the toughest job sites, the MX FUEL™ Tower Light is built with a
- superior impact durability

SPECIFICATIONS

	MXF TL-601
System	MX FUEL™
Battery compatibility	All MX FUEL [™] batteries
Light	LED
Max. AC light output high/medium/low/strobe (lumens)	27,000/ 14,000/ 7000/ -
Max. DC light output high/medium/low/strobe (lumens)	20,000/ 10,000/ 5000/ -
Max. Run time AC mode (h)	Endless
Max. Run time with MXF XC406 (h)	3/ 6/ 10
Max. Mast height (m)	3.1
Weight with battery (EPTA) (kg)	53 (MXF XC406)
Includes	1 x MXF XC406 battery,integrated charger, No kitbox
Article number	4933471844



101









ONERKEY







WITHSTANDS THE STORM

✓ Due to the motorised mast, the tower light is capable to be set up in less than 10 sec. The mast is extendable up

durable, high impact polycarbonate lenses that delivers

protected from the elements at all times

ONE-KEY™ tool tracking & security offers a free of charge cloud-based tracking network and inventory management platform for your tools. ONE-KEY™ also features a remote locking functionality. Customisation function allows for precise tool adjustment to application

The built-in MX FUEL[™] charger gives you the freedom to charge any MX FUEL[™] battery in the AC mode ✓ IP 55 rating








MILWAUKEE® IS THE SOLUTIONS PROVIDER







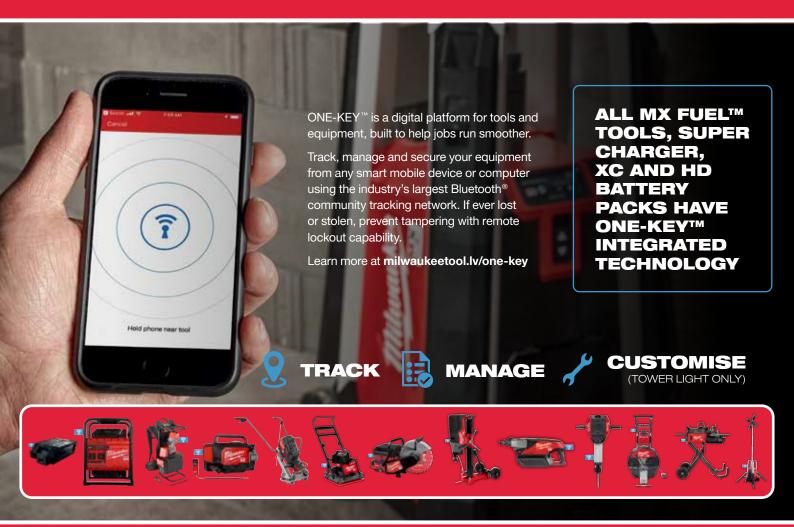

DOWNLOAD THE FREE ONE-KEY™ APP VIA THE APP STORE OR GOOGLE PLAY STORE.



PLEASE SEE OUR POWERTOOLS AND ACCESSORIES CATALOGUES FOR MORE INFO, OR GO ONLINE AT **MILWAUKEETOOL.LV**

Distributed by:

Techtronic Industries Nordic Aps Stamholmen 147, 1., 2650 Hvidovre, Tanska Puh. +358 800 1 09000 milwaukeetool.lv



The Bluetooth[®] word mark and logos are registered trademarks owned by Bluetooth SIG, Inc., and any use of such marks by TTI is under licence. Other trademarks and trade names are those of their respective owners. All data incl. service and warranty conditions as well as product range are subject to change without notice. Pictures not binding. No liability for printing errors or mistakes. Copyright 2023 - Milwaukee Electric Tools